

Description

Model MS061802 is a multi-octave high power amplifier operating from 6 to 18 GHz range with 2 W typical output power. It provides 37 dB of small signal gain with flatness ± 1.5 dB. MS061802 uses advanced GaAs microwave device technology and provides long term reliability and high ruggedness. Hermetically sealed package implements reliable operation in various harsh environments.



Features:

- 2 W RF Output Power
- 50 Ohm Input / Output Impedance
- Digital 5 – bit gain control (0.9dB – 27.9dB)
- Built-in output power detector
- High switching speed (300 ns)
- Gain – temperature compensation
- High reliability and ruggedness

Applications:

- Communications Systems
- Test Instrumentation
- Broadband RF Telemetry
- Point To Point Radio
- Fiber Optics

Electrical Specifications @ T=25°C, VDC = +9 V, Z_s=Z_L=50Ω

Parameters	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	6		18	GHz
RF Output Power	P _{sat}	2	2.2		W
Output power @1dB compression	P ₋₁	1.8	2.0		W
Small Signal Gain	G _{SS}	34	37	44	dB
Small Signal Gain Flatness	ΔG		± 1.5	± 2.5	dB
VSWR Input / Output	VSWR In/Out		1.6 / 1.8	2.5 / 2.5	
Operating Voltage	VDC	8.6	9	10	V
Operating Current @ P _{sat}	I _{DD}			2.5	A

Mechanical Specifications



Parameters	Value	Unit	Limits
Dimensions	101.8 x 54.7 x 23.1 (4.0 x 2.15 x 0.91)	mm (inch)	Max
Weight	0.18 (0.4)	kg (lb)	Max
RF Connectors, Input / Output	SMA Female		
Interface connectors	X1: Harwin M80-5101022		
	X2 : Harwin M80-5T10222M2-01-331-01-331		
Cooling	External Heatsink		

Environmental Specifications

Parameters	Symbol	Min	Typ	Max	Unit
Operating Temperature (ambient)	T _a	-55		+60	°C
Operating Temperature (baseplate)	T _c	-55		+75	°C
Storage temperature	T _{stg}	-65		+85	°C
Relative Humidity	RH			98	%

Performance Plots

Test Conditions : $T=25^{\circ}\text{C}$, $Z_s=Z_L=50\Omega$

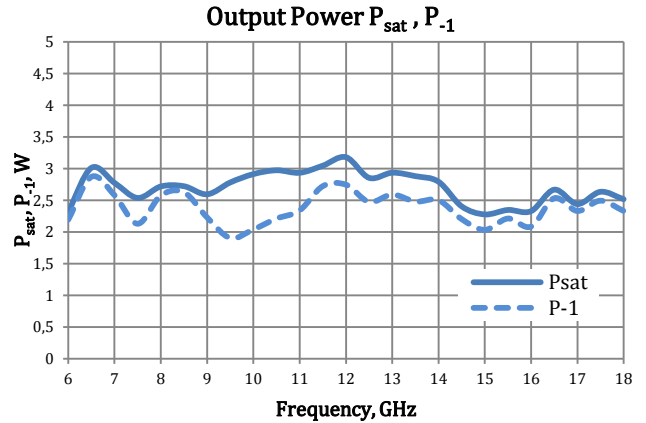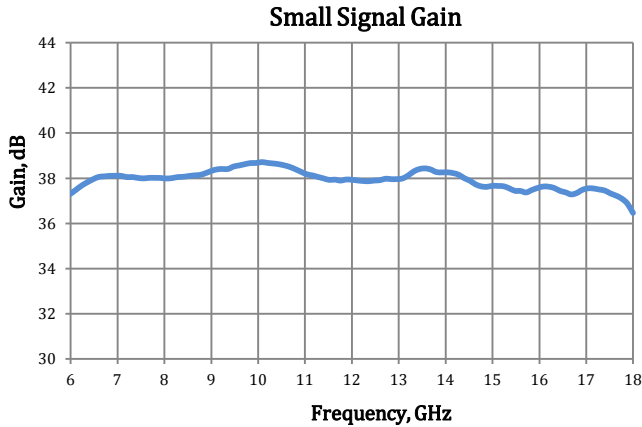

DC Interface Connectors

Connector	Pin#	Description	Specification
X1	1	14.4	Bit 14.4 dB control
	2	7.2	Bit 7.2 dB control
	3	3.6	Bit 3.6 dB control
	4	1.8	Bit 1.8 dB control
	5	0.9	Bit 0.9 dB control
	6	DOUT	Power Detector Output
	7,10	G	Ground
	8	T	Analog Voltage Relative Temperature@10mV/°C
X2	9	Mod	RF Enable (0V or GND=RF Off, +5V or NC=RF On)
	A	+9	DC Power (+8.6... +10VDC)
	B	G(-9)	Ground
	1,2	N/C	No Connection

Mechanical Outline

(All dimensions in millimeters)

